TECHNICAL MANUAL – 8

WHEELS

REPLACEMENT OF THE SPOKE WITH PLATE: FRONT AND REAR WHEEL – LEFT SIDE

WARNING!

Always wear protective gloves and glasses while working on the bicycle.

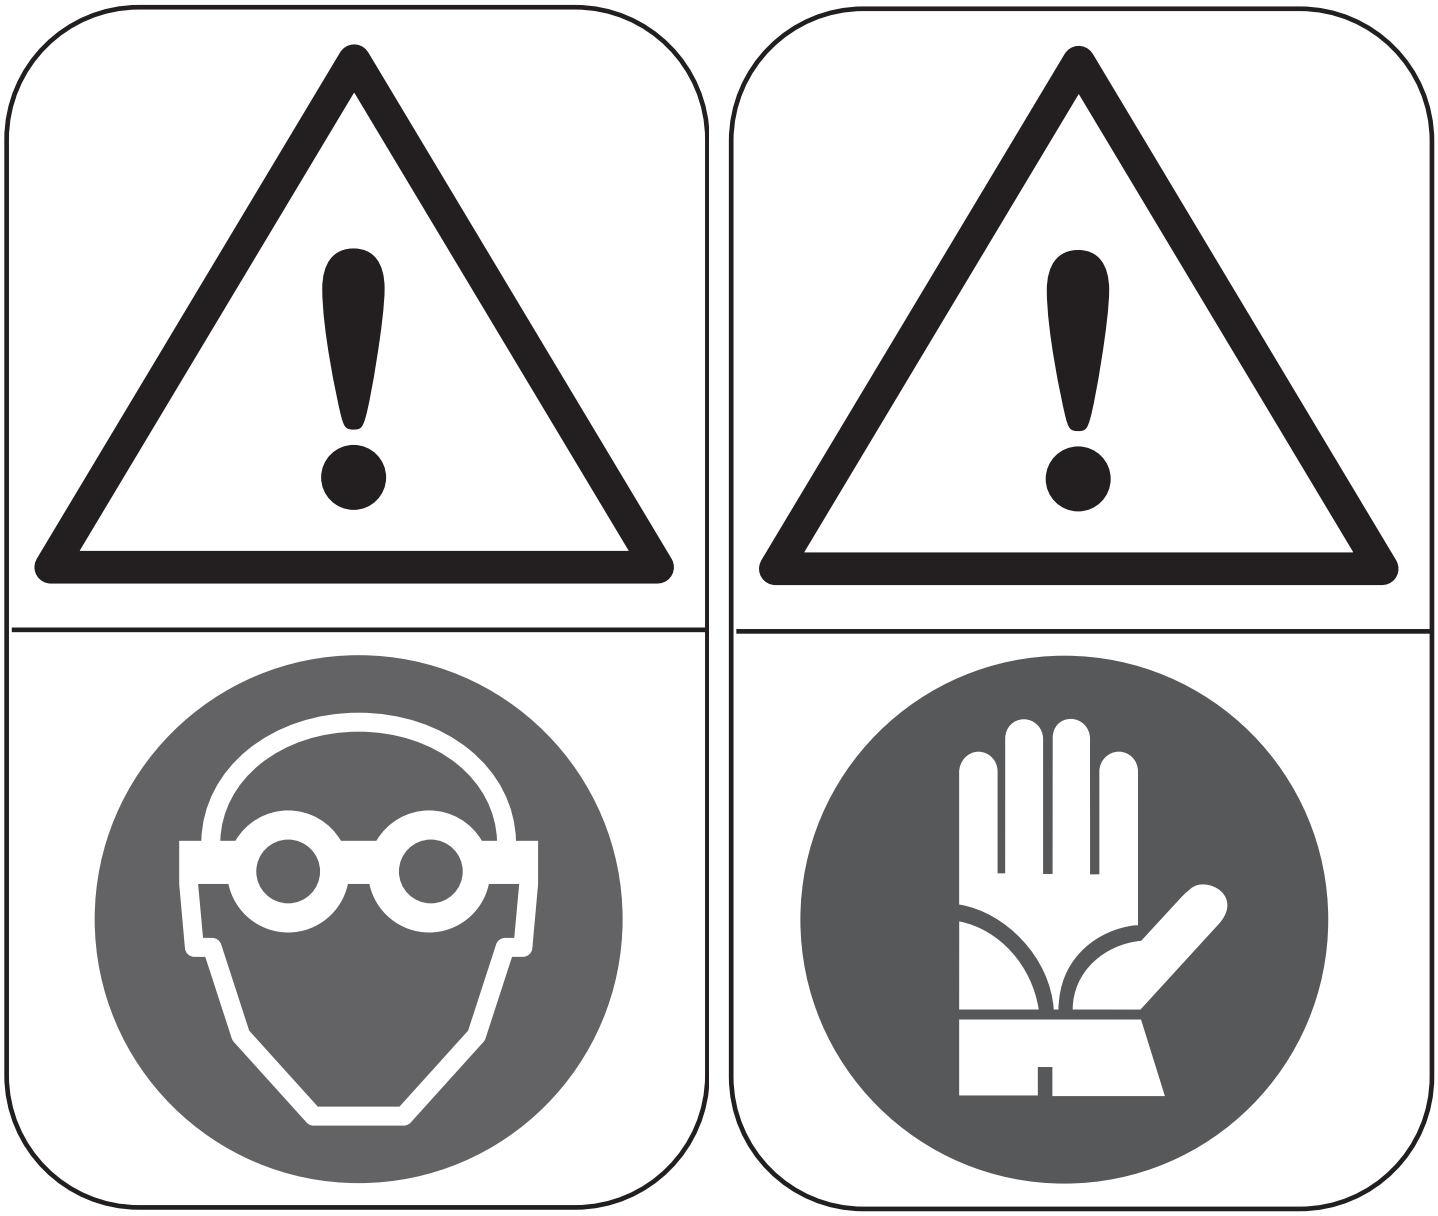

THIS TECHNICAL MANUAL IS INTENDED FOR USE BY PROFESSIONAL MECHANICS.
Anyone who is not a qualified professional for bicycle assembly must not attempt to install and operate on the components independently due to the risk of carrying out incorrect operations which could cause the components to malfunction, resulting in accidents, physical injury or even death.
The actual product may differ from what is illustrated, as the specific purpose of these instructions is to explain the procedures for using the component.

TECHNICAL MANUAL - 8

PROCEDURE	REVISION	DESCRIPTION
8	04/09/ 2024	REPLACEMENT OF THE SPOKE WITH PLATE: FRONT AND REAR WHEEL - LEFT SIDE

PRODUCTS ON WHICH THE PROCEDURE SHOULD BE APPLIED

Refer to the "Table of Technical Manuals for Wheels", available at www.campagnolo.com / section "Technical Documentation – Technical Manuals".

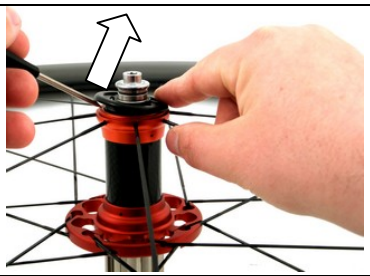

1 Remove the hub: front hub in Technical Manual 2 (from 2 to 21), rear hub in Technical Manual 5 (from 1 to 12).

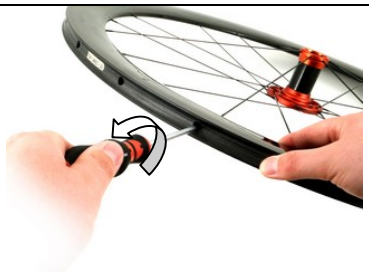

2 With a 5mm hex screwdriver loosen the nipple/nut from the rim.



3 Remove the nipple/nut from the rim.

4 Also remove the plate from the inside of the rim.

5 Remove the spoke from the flange of the hub.

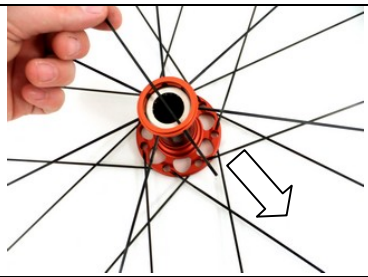

6 Insert the new spoke in the hole in the hub body.

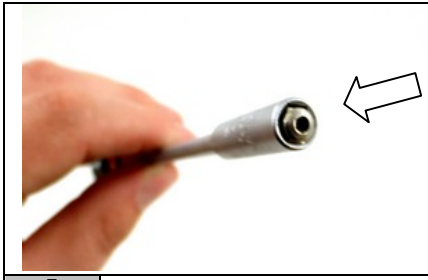

7 Insert the nut inside the body of the hex screwdriver.

8 If necessary, add some grease so that the plate remains attached to the nut and is not lost when fitting the item in the rim.

9 Inserts the plate with the convex part facing the inside of the rim.

10 Insert the nut with the 5mm hex screwdriver.

11 Refit the hub: front hub in Technical Manual 2 (from 56 to 83), rear hub in Technical Manual 5 (from 14 to 24).

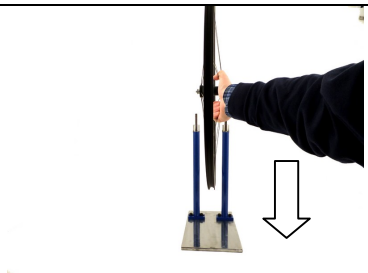

12 To centre the wheel, refer to Technical Manual 6.